



Terrain shown for reference only.


FRONT ELEVATION:
Ramdoor Plus II detailed without Weatherhood.

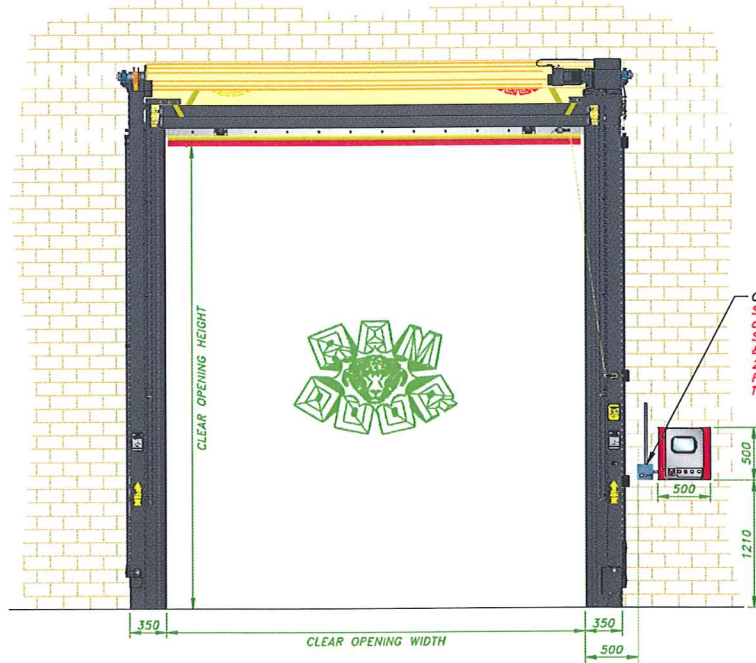

CUSTOMER PREPARATION:
STD Power supply by customer:
Single phase, neutral & earth supply.
240V/1PH/50Hz.
Protected by a 16amp Type D MCB or similar.

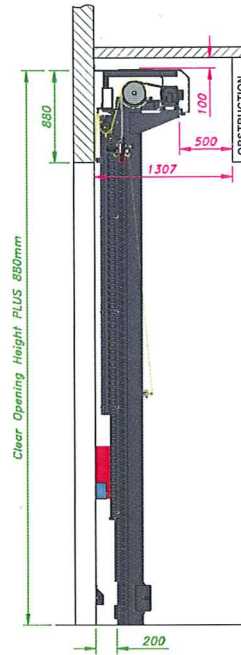


END ELEVATION 1:
Ramdoor Plus II detailed c/w weatherhood and DOUBLE REVERSE fit windbar system and provision STATIC windbar.

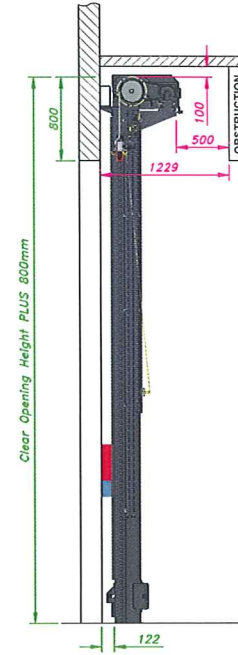


END ELEVATION 2:
Ramdoor Plus II detailed without weatherhood and fitted with DOUBLE FACE fit windbar system and provision STATIC windbar.

PLAN VIEW 1:
Ramdoor Plus II detailed with Weatherhood c/w REVERSE fit windbar system.

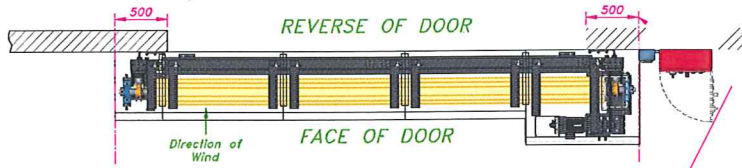

SIDE CLEARANCE:
The side clearance dimensions shown should be regarded as minimum values. These are necessary for general maintenance of drive and non-drive components.

PLAN VIEW 2:
Ramdoor Plus II detailed without Weatherhood c/w with a FACE fit windbar system.

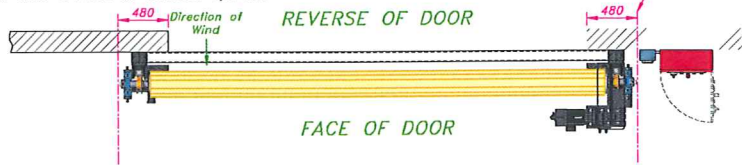

IMPORTANT NOTE:
Union Industries design department must be consulted in the event that the clearance dimensions can not be specifically adhered to.

ISSUE 2: CP: 24/2/10: Isolator moved to the side of the control panel.

TITLE:
Minimum Clearances required for a
RAMDOOR PLUS II
FOR REFERENCE ONLY

TEXT KEY	
 	CUSTOMER
 	INSTALLATION
 	IN-HOUSE
 	ELECTRICAL

ANGEL'S WING, WHITEHOUSE STREET,
HUNSLET, LEEDS. LS10 1AD.
Tel. (0113) 2448393

LOCATION: —	CUSTOMER: UNION INDUSTRIES (Leeds)
DATE: 17 April 08	DRAWN: C. Pace
SCALE: 1:40	APPROVED: P.J.H. Rodgers

THIS DOCUMENT IS THE COPYRIGHT OF UNION INDUSTRIES LTD. IT MUST NOT BE REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT THE PRIOR CONSENT OF UNION INDUSTRIES LIMITED.

DRAWING No.
RAMPLUS/2
ISSUE 2